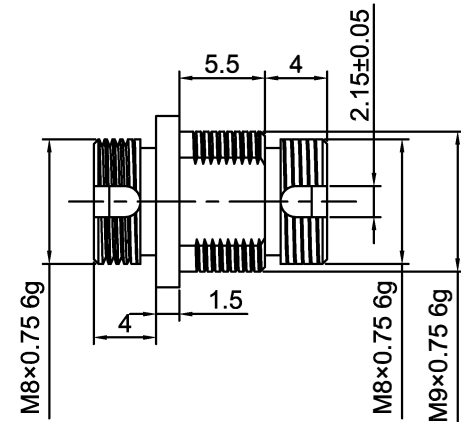
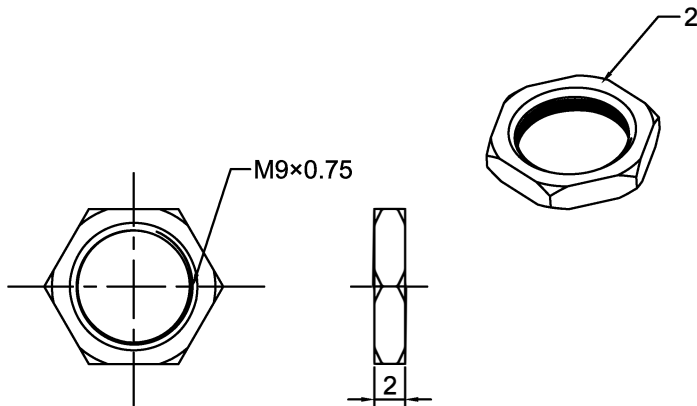


NOTES:
1.ADAPTER COMPLIANT WITH IEC AND TIA/EIA;
2.ALL PARTS MEETS ROHS DIRECTIVE;
3.ALIGNMENT SLEEVE BE ZRO2 AND IL<0.2DB;
4.OPERATING TEMPERATURE IS -40℃~+85℃;
5.STORAGE TEMPERATURE IS -40℃~+85℃.

Unless Otherwise Specified:	
UNIT: mm	
DIM Tol.:	Angle Tol.:
.X ±	.X° ±
.X ±	.X° ±
.XX ±	.XX° ±
.XXX ±	.XXX° ±

1	1	SUS 303	FC Washer	/	/	/
1	1	C3604	FC Nut	/	/	/
1	1	C3604	FC Body	/	/	/
PART ITEM	QTY.	MATERIAL	NAME	Surface Treatment	N.W.	REF.
DR.		CHKD.	APPD.	Intended Use		SCALE 3:1
				TITLE FC D Adapter		
				DWG No: AD-FCRD-1-1S	VERSION A	SHEET 1 of 1