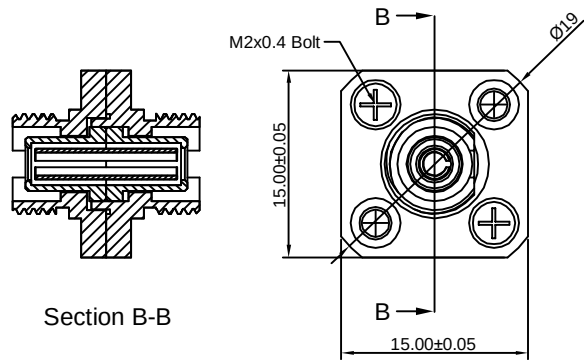


- NOTES:
- 1.ADAPTER COMPLIANT WITH IEC AND TIA/EIA;
 - 2.ALL PARTS MEETS ROHS DIRECTIVE;
 - 3.HOUSING ARE BRASS NICKEL PLATED
 - 4.ALIGNMENT SLEEVE CAN BE PB OR ZRO2 FOR OPTION;
 5. WITHDRAW FORCE OF SLEEVE IS 2-6N.
 6. IL<=0.2dB.
 - 7.OPERATING TEMPERATURE IS -40℃~+85℃
 - 8.STORAGE TEMPERATURE IS -40℃~+85℃

Unless Otherwise Specified:	PART ITEM	QTY.	MATERIAL	NAME	Surface Treatment	N.W.	REF.
UNIT: mm	DR.		CHKD.	APPD.	Intended Use		SCALE x:1
DIM Tol.: X. ± .X ± .XX ± .XXX ±	Angle Tol.: X°. ± .X°. ± .XX°. ± .XXX°. ±	TITLE FC Square Adapter,Key 2.05mm, APC type					
DWG No.					VERSION A	SHEET 1 of 1	