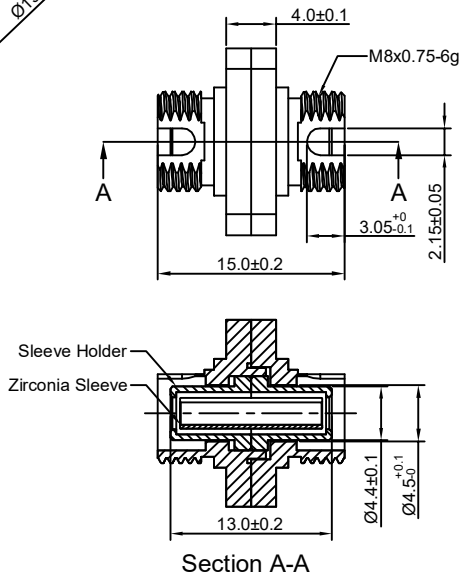
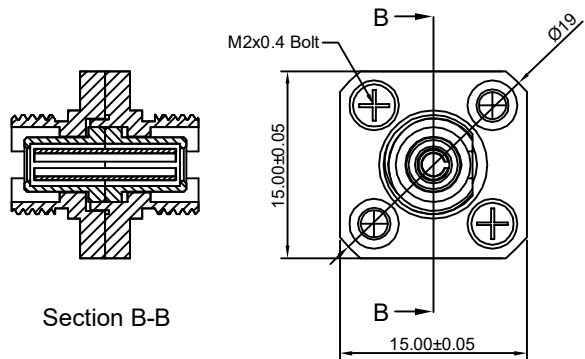


- NOTES:
- 1.ADAPTER COMPLIANT WITH IEC AND TIA/EIA;
  - 2.ALL PARTS MEETS ROHS DIRECTIVE;
  - 3.HOUSING ARE BRASS NICKEL PLATED
  - 4.ALIGNMENT SLEEVE CAN BE PB OR ZRO2 FOR OPTION;
  5. WITHDRAW FORCE OF SLEEVE IS 2-6N.
  6. IL<=0.2dB.
  - 7.OPERATING TEMPERATURE IS -40℃~+85℃
  - 8.STORAGE TEMPERATURE IS -40℃~+85℃

| Unless Otherwise Specified:                  |  | PART ITEM                                          | QTY. | MATERIAL                                       | NAME  | Surface Treatment | N.W.         | REF.            |
|----------------------------------------------|--|----------------------------------------------------|------|------------------------------------------------|-------|-------------------|--------------|-----------------|
| UNIT: mm                                     |  | DR.                                                |      | CHKD.                                          | APPD. | Intended Use      |              | SCALE<br>x:1    |
| DIM Tol.:<br>X. ±<br>.X ±<br>.XX ±<br>.XXX ± |  | Angle Tol.:<br>X°. ±<br>.X° ±<br>.XX° ±<br>.XXX° ± |      | TITLE<br>FC Square Adapter,Key 2.15mm, PC type |       |                   |              |                 |
|                                              |  | DWG No.                                            |      |                                                |       |                   | VERSION<br>A | SHEET<br>1 of 1 |