
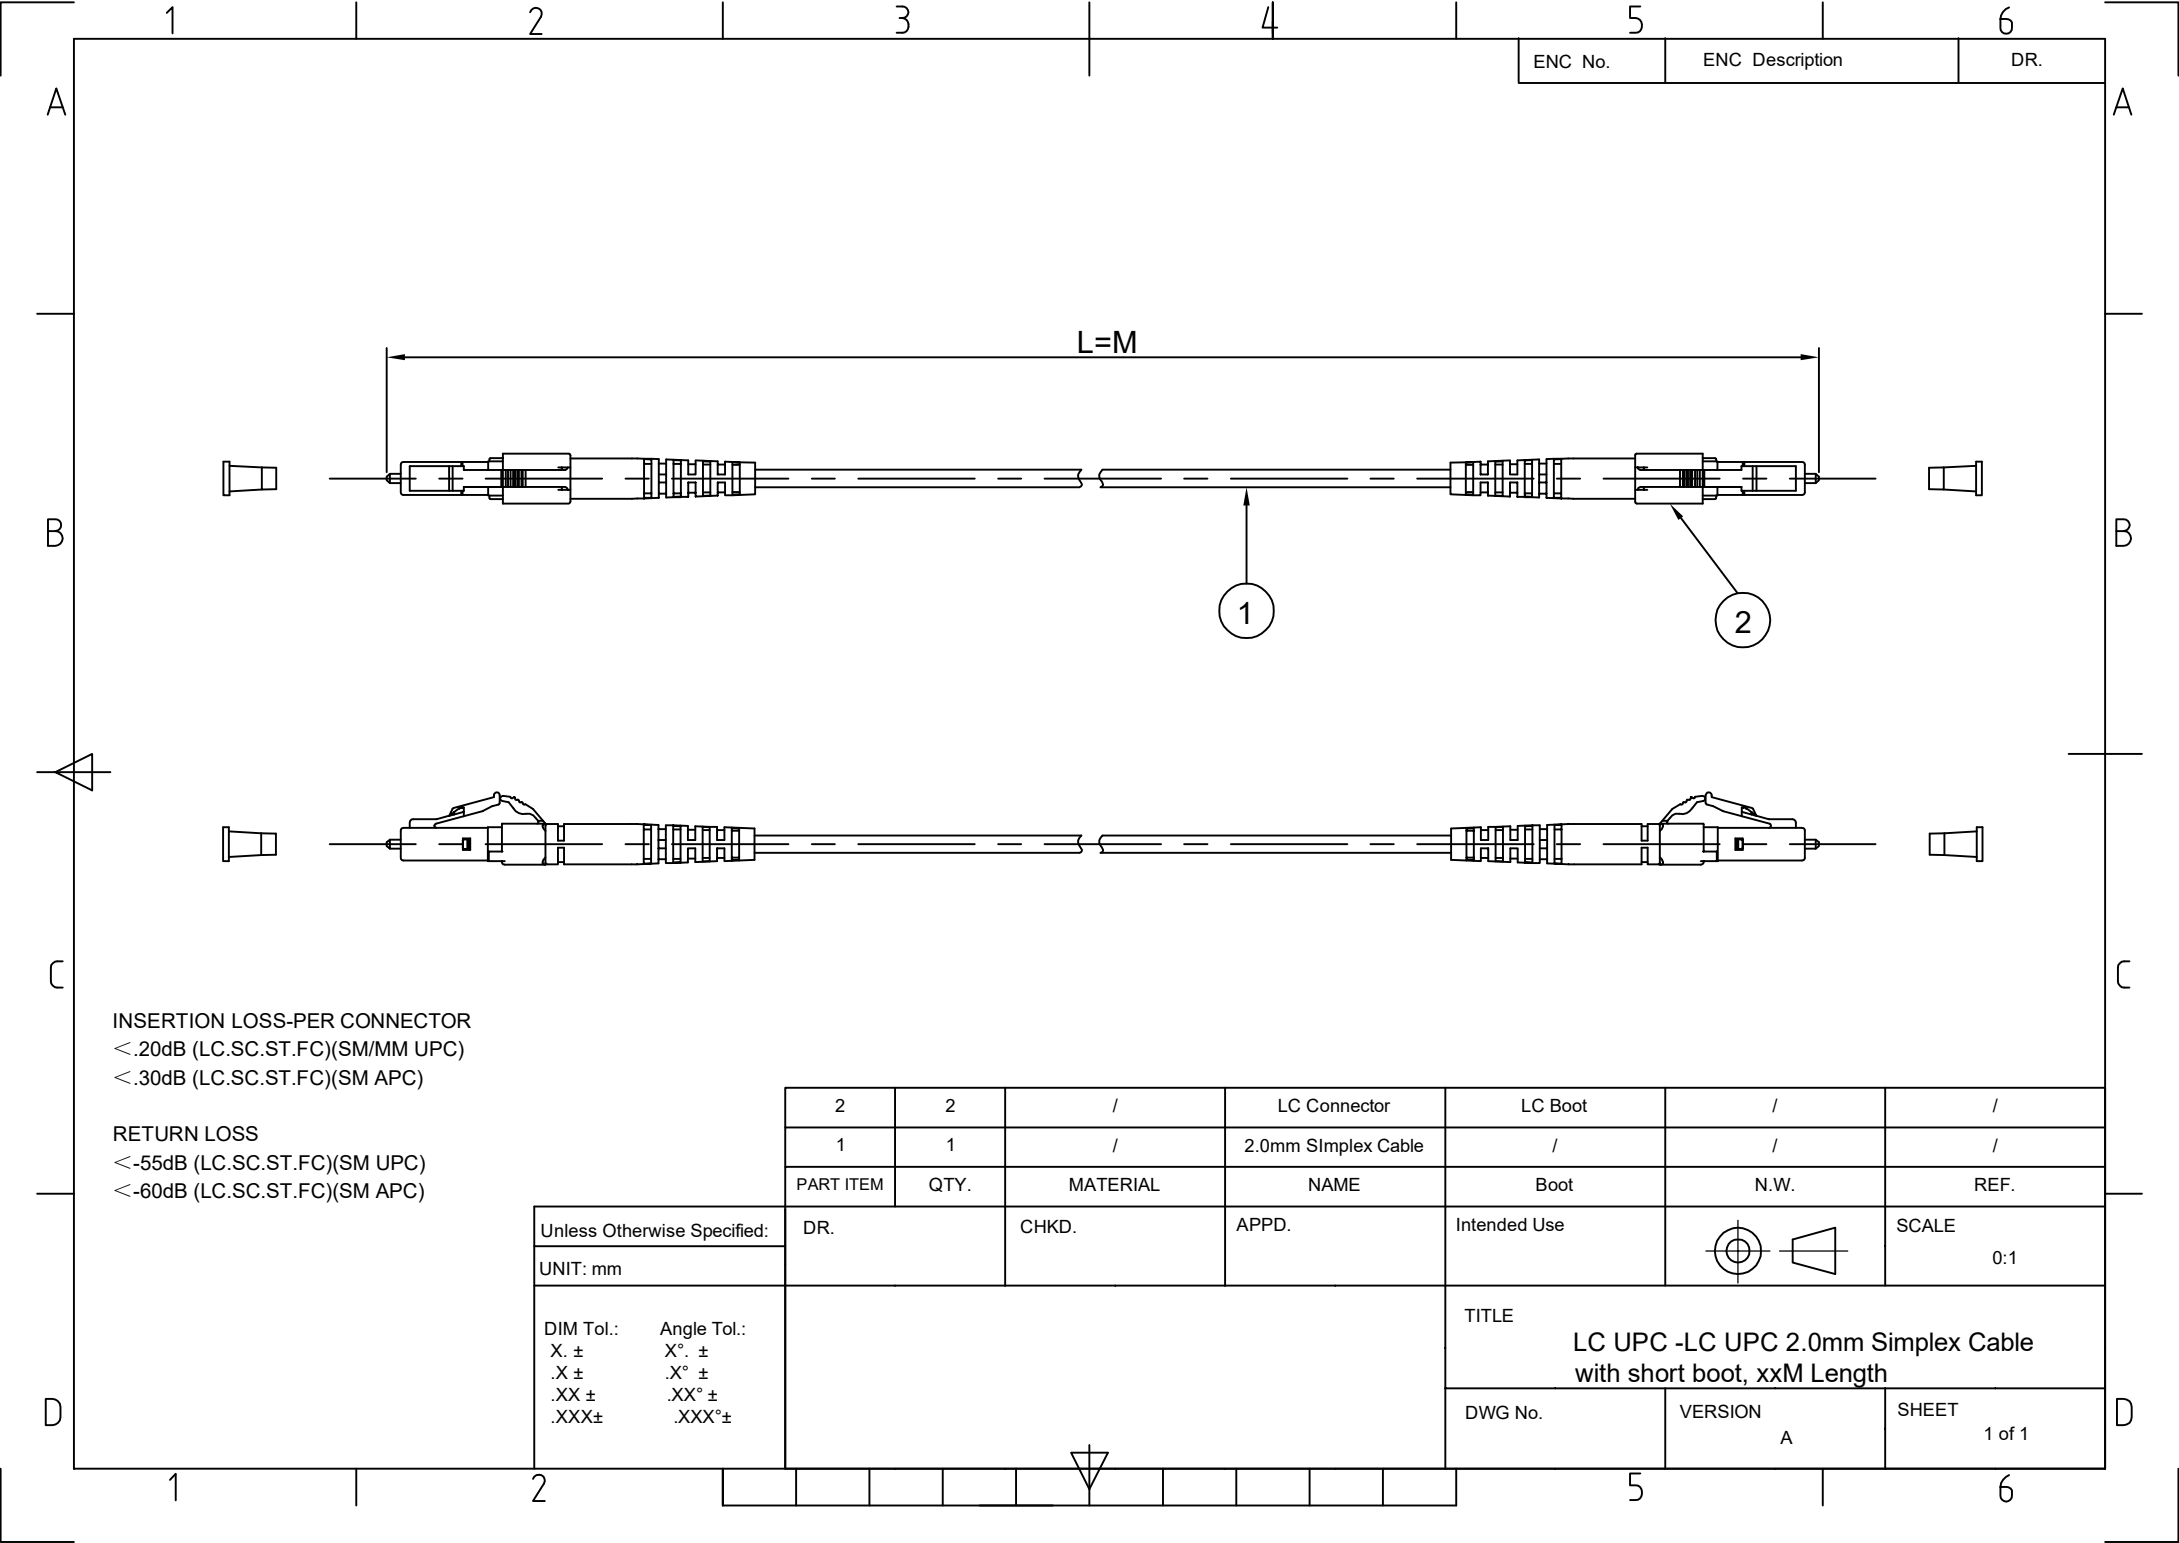




ENC No.	ENC Description	DR.
---------	-----------------	-----

INSERTION LOSS-PER CONNECTOR
<.20dB (LC.SC.ST.FC)(SM/MM UPC)
<.30dB (LC.SC.ST.FC)(SM APC)

RETURN LOSS
<-55dB (LC.SC.ST.FC)(SM UPC)
<-60dB (LC.SC.ST.FC)(SM APC)

2	2	/	LC Connector	LC Boot	/	/
1	1	/	2.0mm Simplex Cable	/	/	/
PART ITEM	QTY.	MATERIAL	NAME	Boot	N.W.	REF.
DR.		CHKD.	APPD.	Intended Use		SCALE 0:1
				TITLE LC UPC -LC UPC 2.0mm Simplex Cable with short boot, xxM Length		
				DWG No.		VERSION A