



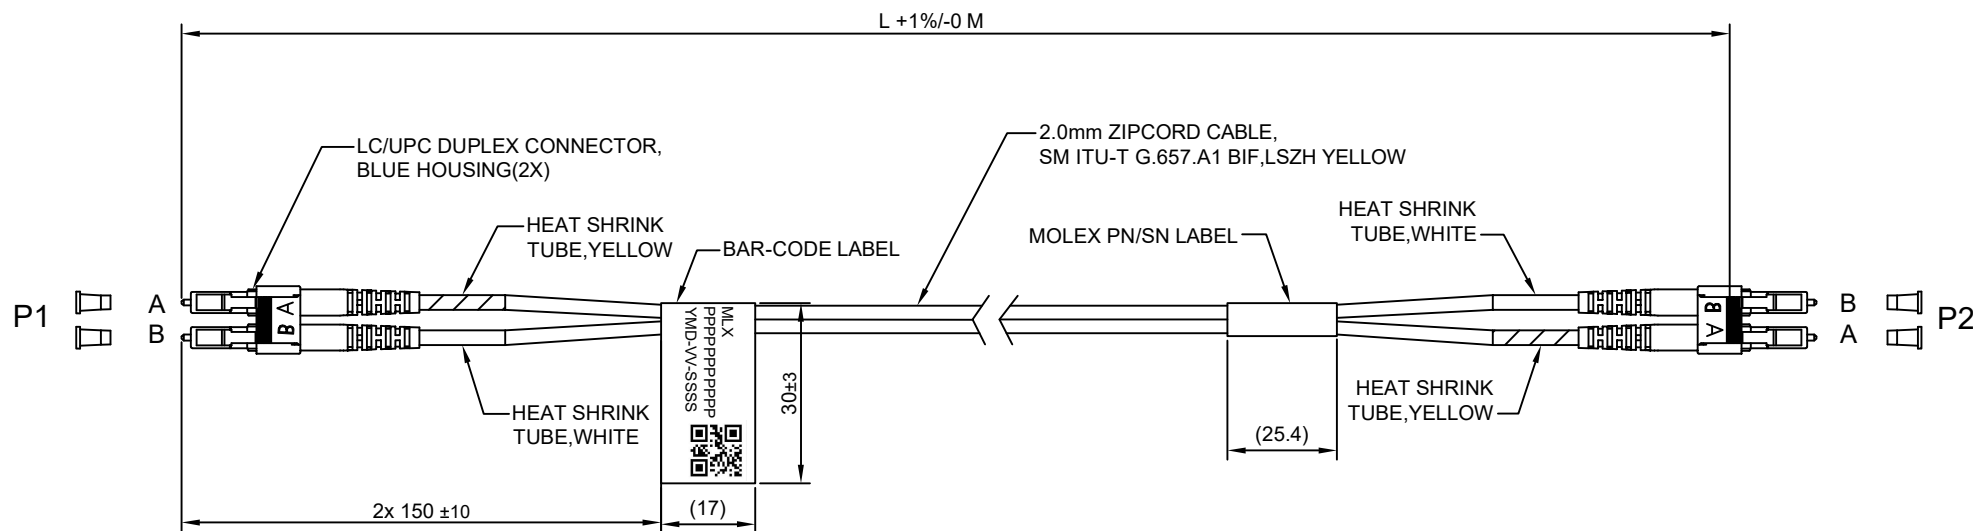

ENDFACE GEOMETRY	
PARAMETER	1.25mm DIAMETER LC FERRULE
Fiber Height	-100 to 50nm
Radius of Curvature(ROC)	7 to 25mm
Angle degree	N/A
Apex Offset	<50um
Outside Diameter	1.2490 to 1.2495mm

INSERTION LOSS
 < -0.20dB for UPC Connector

RETURN LOSS
> 55dB UPC POLISH

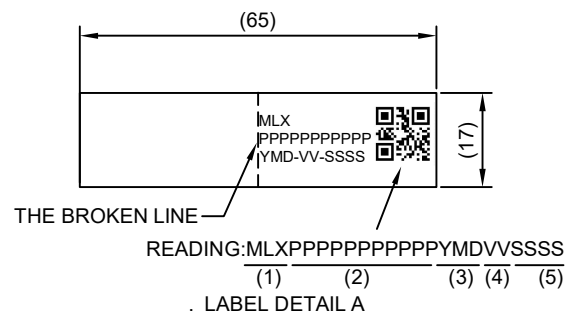

TESTED PER FOTP - 171 METHOD B
(UNLESS OTHERWISE REQUESTED)
1310nm(SM)

	1	x	xxxx	xxx	/	/	/
	PART ITEM	QTY.	DESCRIPTION	NAME	Surface Treatment	N.W.	REF.
Unless Otherwise Specified:	DR.		CHKD.	APPD.	Intended Use		SCALE 0:1
UNIT: mm							
DIM Tol.: .X ± .XX ± .XXX±	Angle Tol.: X° ± .X° ± .XX° ± .XXX°±				TITLE SM DX LC/UPC-LC/UPC xx M JUMPER		
					DWG No.	VERSION A	SHEET 1 of 1