


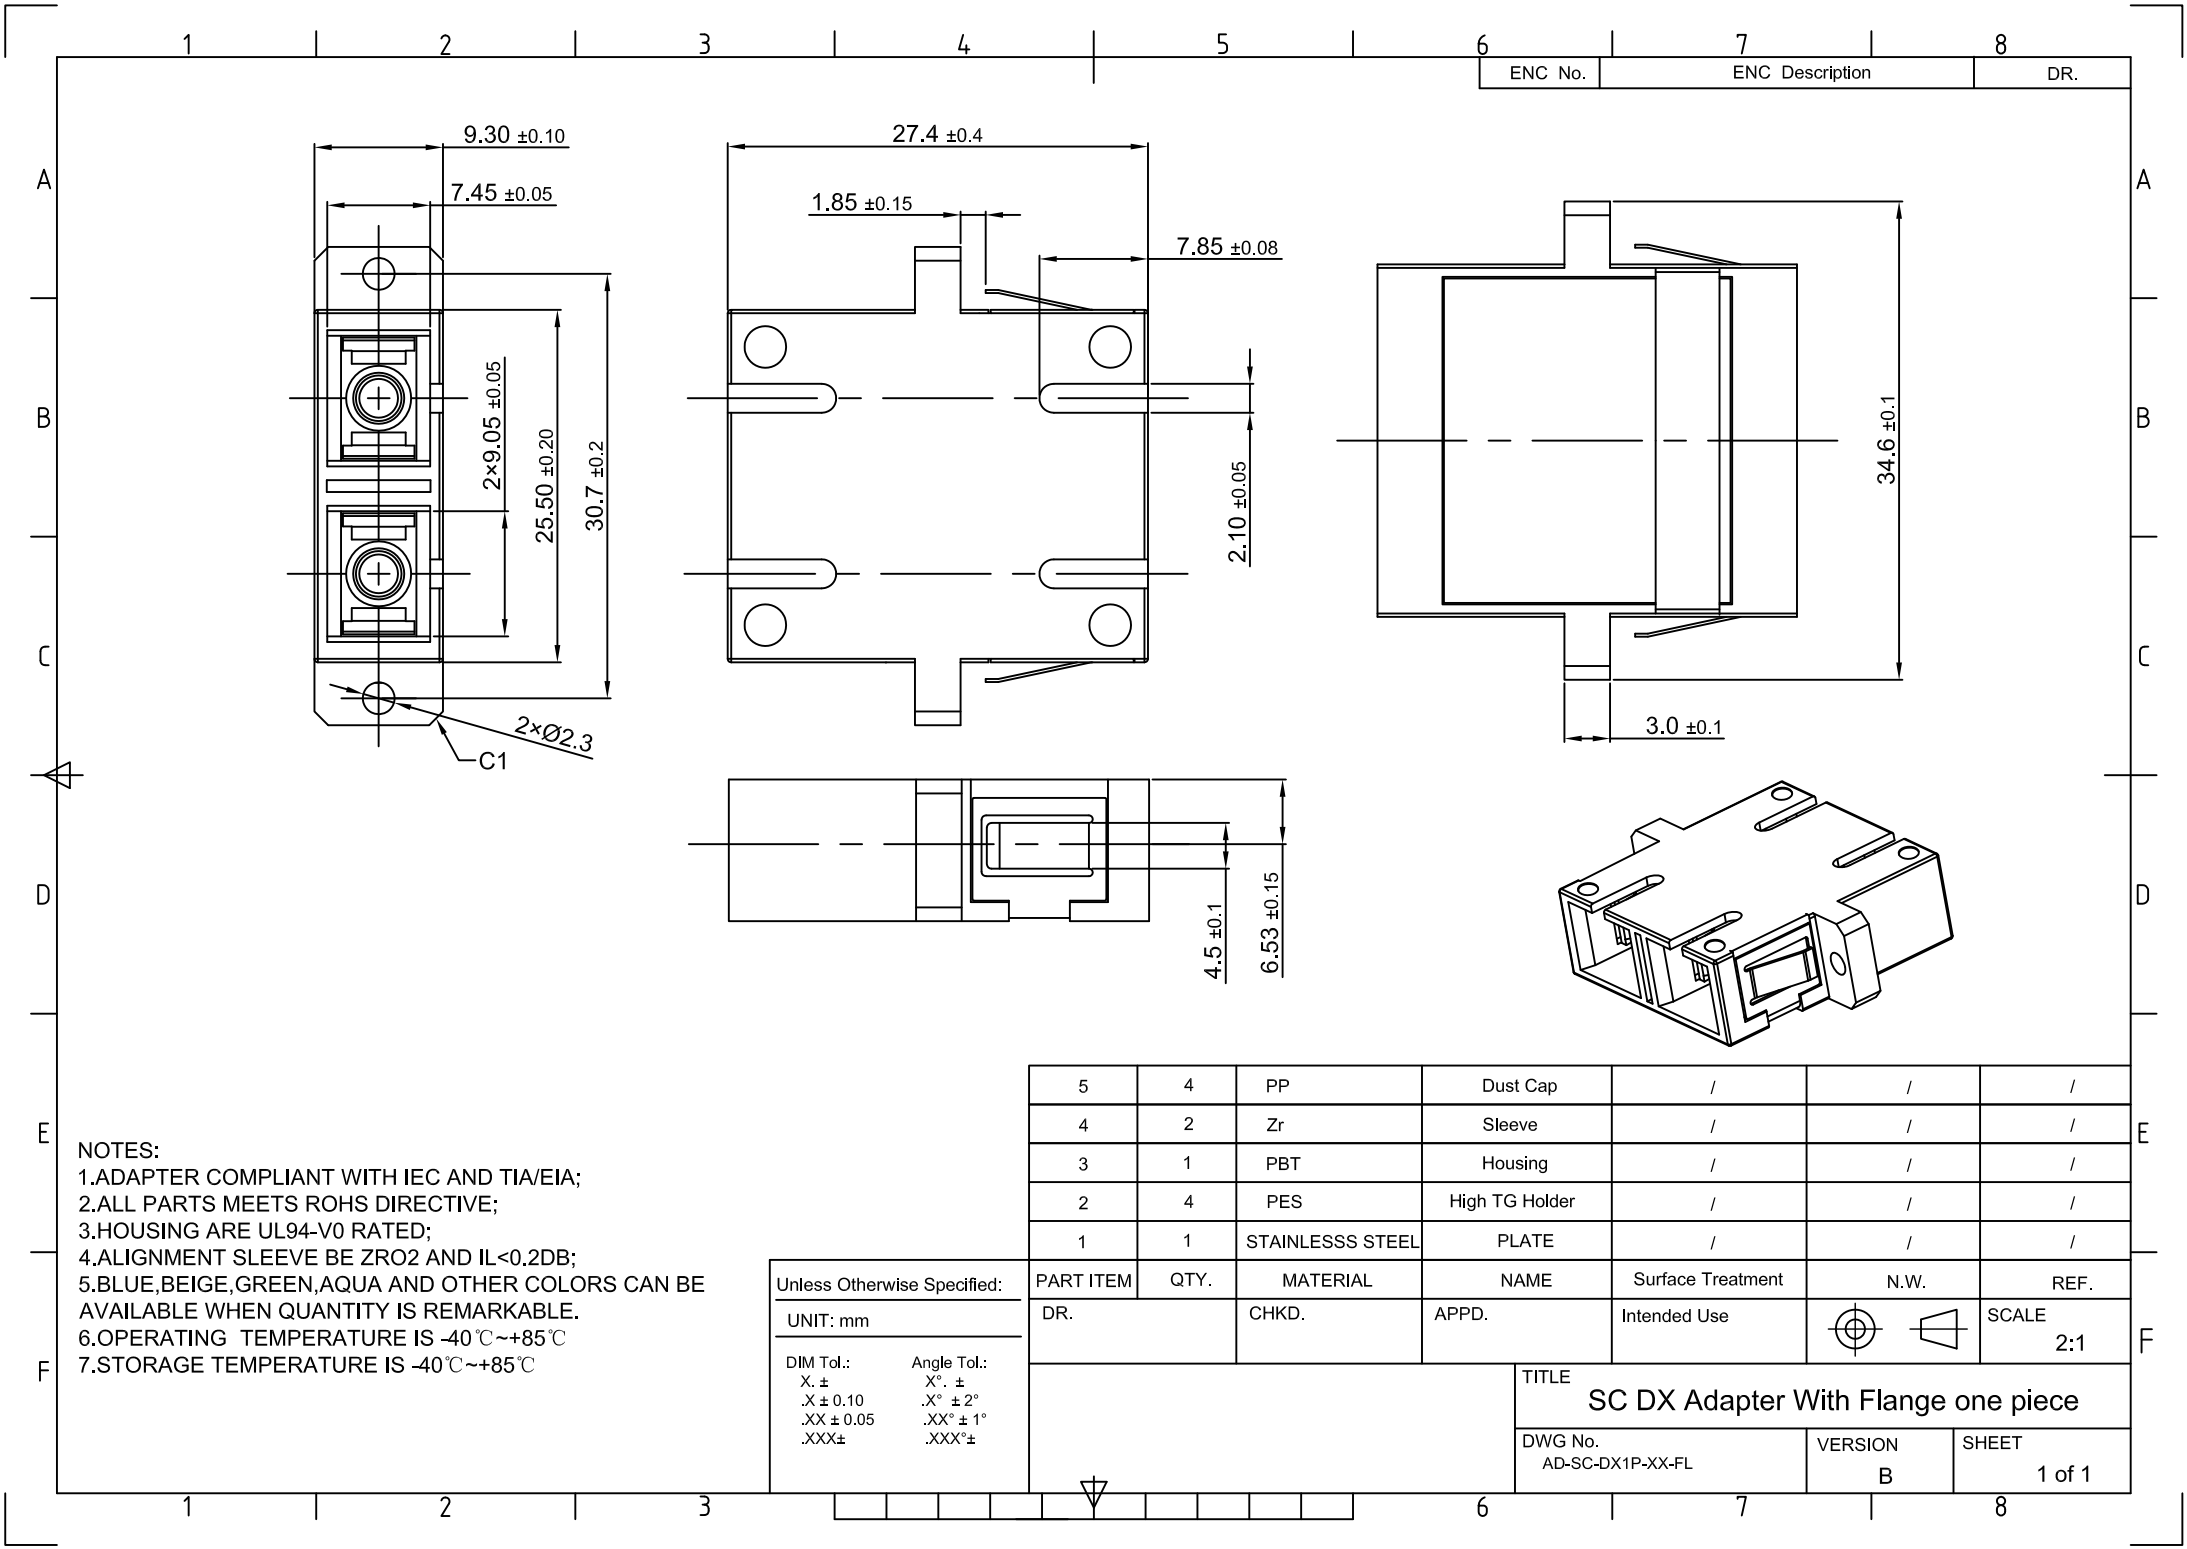

NOTES:
1.ADAPTER COMPLIANT WITH IEC AND TIA/EIA;
2.ALL PARTS MEETS ROHS DIRECTIVE;
3.HOUSING ARE UL94-V0 RATED;
4.ALIGNMENT SLEEVE BE ZRO2 AND IL<0.2DB;
5.BLUE,BEIGE,GREEN,AQUA AND OTHER COLORS CAN BE AVAILABLE WHEN QUANTITY IS REMARKABLE.
6.OPERATING TEMPERATURE IS -40℃~+85℃
7.STORAGE TEMPERATURE IS -40℃~+85℃

Unless Otherwise Specified:	
UNIT: mm	
DIM Tol.:	Angle Tol.:
X. ±	X°. ±
.X ± 0.10	.X° ± 2°
.XX ± 0.05	.XX° ± 1°
.XXX±	.XXX°±

5	4	PP	Dust Cap	/	/	/
4	2	Zr	Sleeve	/	/	/
3	1	PBT	Housing	/	/	/
2	4	PES	High TG Holder	/	/	/
1	1	STAINLESSS STEEL	PLATE	/	/	/
PART ITEM	QTY.	MATERIAL	NAME	Surface Treatment	N.W.	REF.
DR.	CHKD.	APPD.	Intended Use			SCALE 2:1
			TITLE SC DX Adapter With Flange one piece			
			DWG No. AD-SC-DX1P-XX-FL	VERSION B	SHEET 1 of 1	