


|          |         |                 |      |     |       |
|----------|---------|-----------------|------|-----|-------|
| Rev. No. | ENC No. | ENC Description | Date | DR. | APPD. |
|----------|---------|-----------------|------|-----|-------|

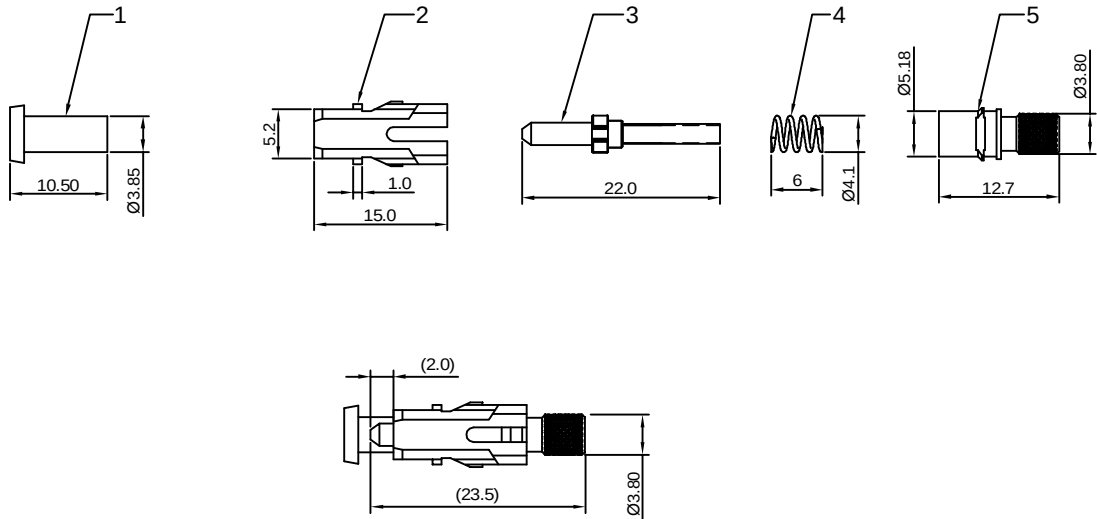

Ferrule:  
SM UPC: ID 125.5+1/-0um, Concentricity 1um;  
SM APC (Conical or 8° Pre-angled Conical): ID 125.5+1/-0 um Concentricity 1um;  
MM UPC: ID 127.0+3/-0um, Concentricity 4um;

Connector Technical Data:  
SM UPC/APC: IL<=0.3dB (@1310nm), RL>=50/60dB;  
MM UPC: IL<=0.3dB (@850nm);

Connector Operation Temperature: -20°C~+70°C;  
Connector Storage Temperature: -40°C~+85°C;

|           |       |                 |              |                                                                           |              |
|-----------|-------|-----------------|--------------|---------------------------------------------------------------------------|--------------|
| 5         | 1     | C3604 Ni-plated | Stopper      | /                                                                         | /            |
| 4         | 1     | SUS304          | Spring       | /                                                                         | /            |
| 3         | 1     | Zirconia + SUS  | Ferrule Body | /                                                                         | /            |
| 2         | 1     | PBT+15%GF       | Plug Frame   | /                                                                         | /            |
| 1         | 1     | PE              | Dust Cap     | /                                                                         | /            |
| PART ITEM | QTY.  | MATERIAL        | NAME         | N.W.                                                                      | REF.         |
| DR.       | CHKD. | APPD.           | Intended Use |                                                                           | SCALE 2:1    |
|           |       |                 | TITLE        | SC Simplex 3.0/2.0/0.9mm Connector with 3.8mm Stopper, no Boot, no Crimps |              |
|           |       |                 | DWG No.      | VERSION A                                                                 | SHEET 1 of 1 |