


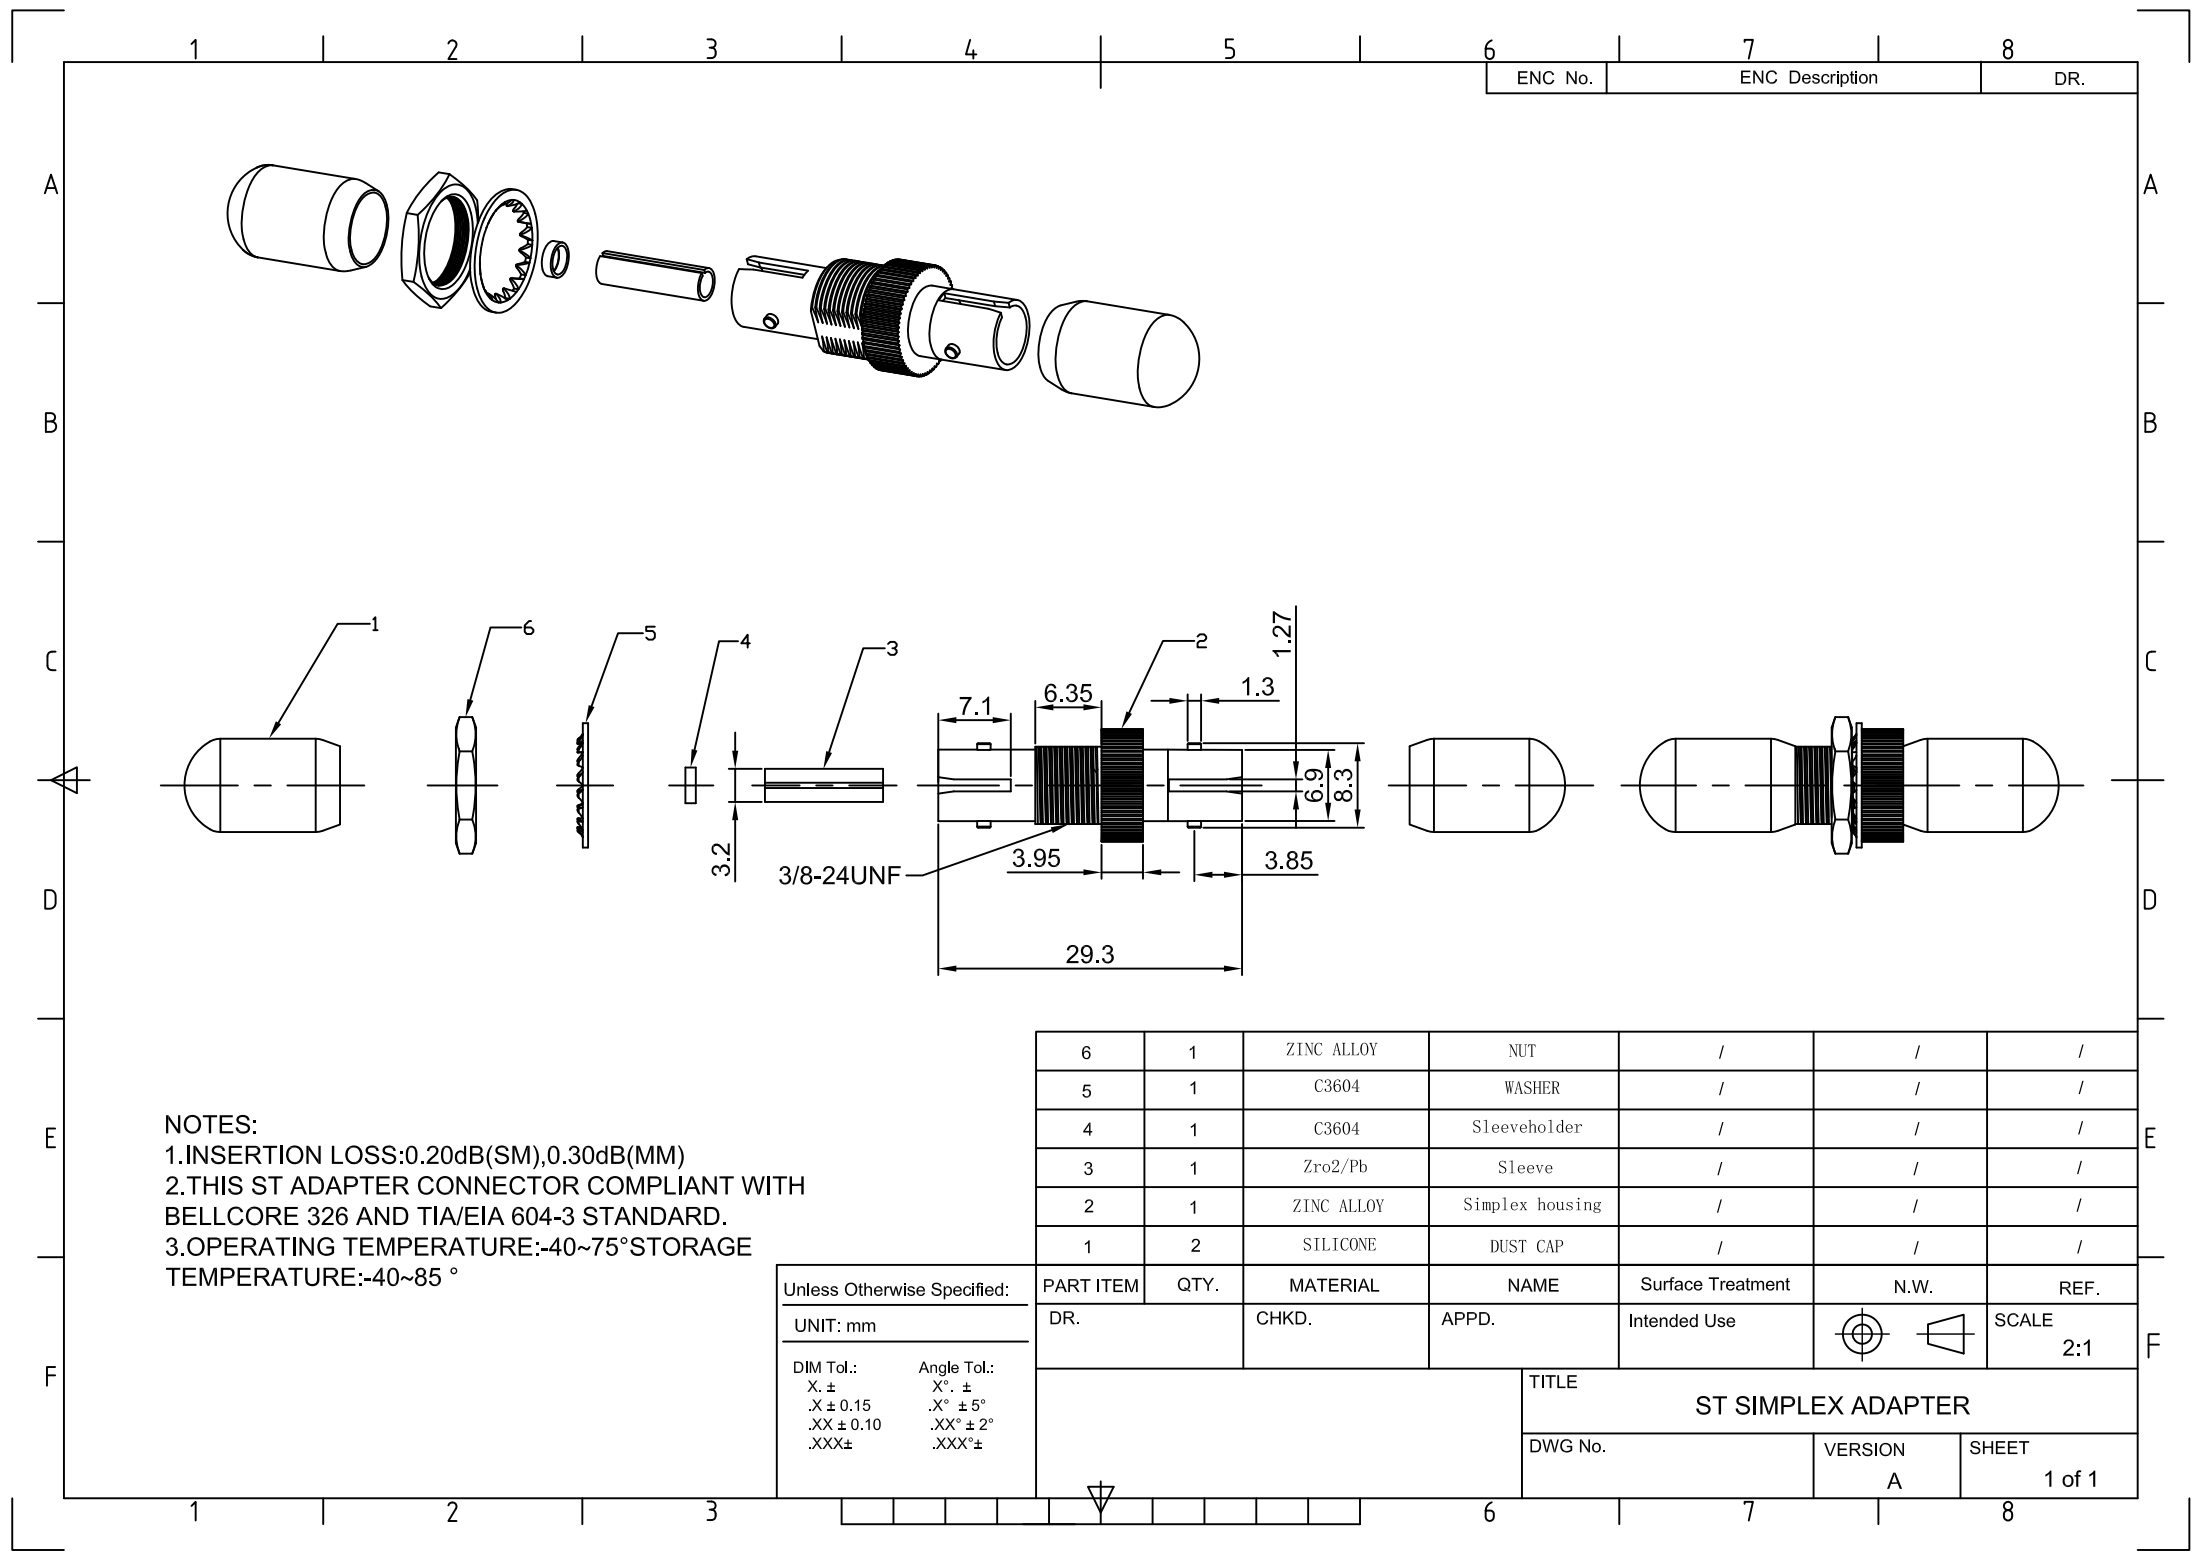

NOTES:
1.INSERTION LOSS:0.20dB(SM),0.30dB(MM)
2.THIS ST ADAPTER CONNECTOR COMPLIANT WITH
BELLCORE 326 AND TIA/EIA 604-3 STANDARD.
3.OPERATING TEMPERATURE:-40~75°STORAGE
TEMPERATURE:-40~85 °

6	1	ZINC ALLOY	NUT	/	/	/
5	1	C3604	WASHER	/	/	/
4	1	C3604	Sleeveholder	/	/	/
3	1	Zro2/Pb	Sleeve	/	/	/
2	1	ZINC ALLOY	Simplex housing	/	/	/
1	2	SILICONE	DUST CAP	/	/	/

Unless Otherwise Specified:		PART ITEM	QTY.	MATERIAL	NAME	Surface Treatment	N.W.	REF.
UNIT: mm		DR.		CHKD.	APPD.	Intended Use	 	SCALE 2:1
DIM Tol.: X. ± .X ± 0.15 .XX ± 0.10 .XXX±					TITLE ST SIMPLEX ADAPTER			
Angle Tol.: X°. ± .X° ± 5° .XX° ± 2° .XXX°±					DWG No.		VERSION A	SHEET 1 of 1